



SPECIFICATIONS

- (A) CLASSIFICATION : FIXED TEMPERATURE SPOT TYPE HEAT DETECTOR , CLASS 1,
WATERPROOF TYPE , ACIDPROOF/ALKALIPROOF TYPE
- (B) NATIONAL TYPE APPROVAL NO. : KAN23~8
- (C) RATED VOLTAGE / CURRENT : 30VDC , 75mA
- (D) WORKING VOLTAGE RANGE : 15VDC TO 30VDC
- (E) MAXIMUM NUMBER OF DETECTORS CONNECTED : NO LIMIT
- (F) RESPONSE LAMP : RED LED
- (G) PERMISSIBLE AMBIENT TEMP : -10°C TO 55°C
- (H) COMPATIBLE CONTROL PANELS / TRANSMITTERS :
NOHMI'S P-TYPE CONTROL PANELS INCORPORATING N-13 AND B-10 CIRCUITS OR NEWER
(EXCL. B-11 AND B-15)
R-TYPE TRANSMITTERS FOR R-12 & R-1100 SERIES
- (I) MAIN MATERIAL : (BODY) PBT (POLYBUTYLENE TEREPHTHALATE) RESIN (LIGHT GRAY)
(HEAT RECEIVING PLATE) TITAN PLATE
- (J) WEIGHT : APPROX 95g
- SUITABLE BOXES
- a) RECESS BOX
- MEDIUM SIZE SQUARE OUTLET BOX , SHALLOW TYPE
102X102X44 JIS C 8340
 - COVER FOR FINISHING PLASTER JIS C 8340 ⑤
- b) SURFACE BOX JIS C 8340

INSTALLATION WITH RECESS BOX

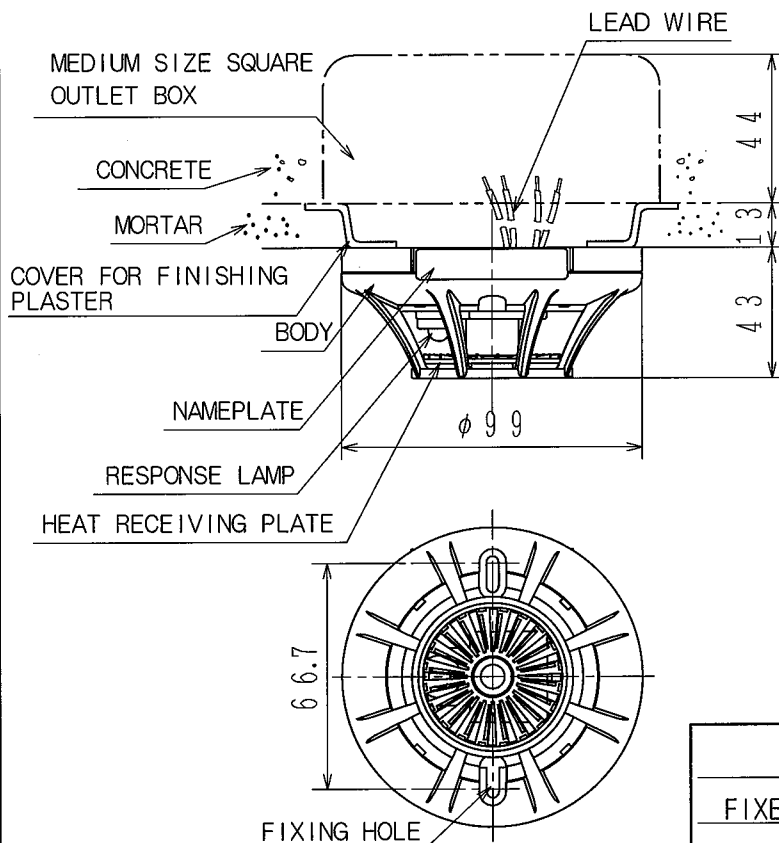

INSTALLATION WITH SURFACE BOX

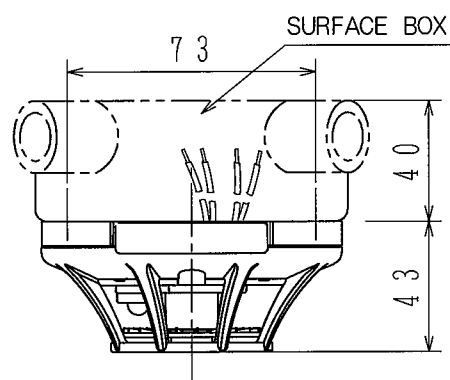

MODEL FDLJ106-DFW-75

FIXED TEMPERATURE SPOT TYPE HEAT DETECTOR
WATERPROOF TYPE, ACIDPROOF/ALKALIPROOF TYPE,
W/RESPONSE LAMP

UNIT : mm	DESIGNED BY	TRACED BY
SCALE : /		Y. Kuzaki
DATE : SEP. 28. '12	CHECKED BY K. Takegoshi	APPROVED BY K. Takahashi
DWGNO FDLJ60142e	1	NQ

NOHMI BOSAI LTD.

GKF05170